


2X2

WORK BIKE

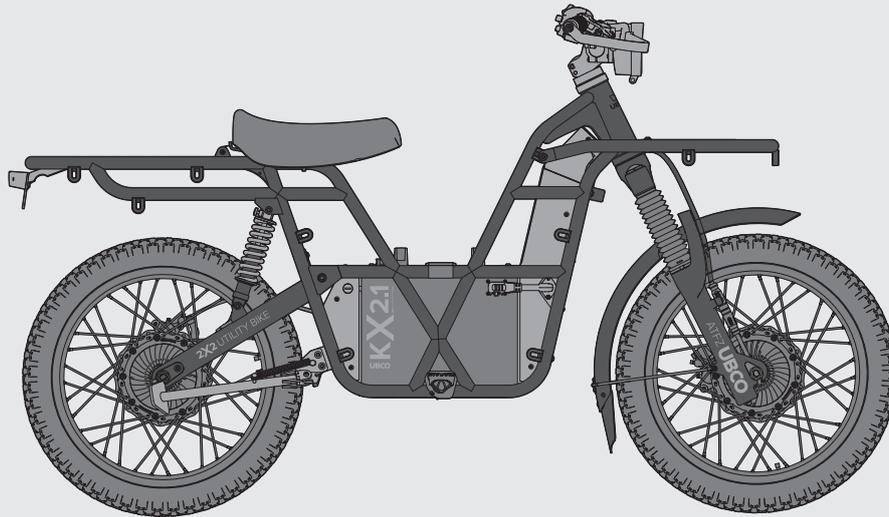

2x2_InfoSheet_v2.7

CHOOSE YOUR POWER SUPPLY:



OR



OR



OR



Dimensions

Weight excl power supply: 50.7kg | 111.6lb
+ 2.1kWh power supply: 63.7kg | 140.2lb
+ 2.6kWh power supply: 66.7kg | 147.3lb
+ 3.1kWh power supply: 68.7kg | 151.2lb
Height: 1,025mm | 40.4"
Seat height: 815mm | 32"
Width (handlebars): 840mm | 33"
Length: 1,820mm | 72"
Wheelbase: 1215mm | 47.8"

Performance

Max speed: 50km/h | 30mph.
High torque geared drivetrain.

Drive Train

All wheel drive.
2 x 1kw Flux² motors:
▶ Brushless DC air cooled.
▶ High durability planetary geared system.
▶ Fully splined gear interfaces.
▶ Sealed bearings.
▶ Active heat management.
▶ Active venting for residual moisture.

Brakes

UBCO Quadratic² brake system:
▶ Hydraulic & regenerative brakes operate together.
▶ Active regenerative braking (brake activated):
▶ Independent front and rear brake control.
▶ Passive regenerative braking (off throttle).
DOT approved hydraulic brakes.
203 x 2.3mm rotors.
DOT approved Dash 3 brake lines.

Wheels

9 gauge stainless steel spokes.
Tangential double-crossed lacing pattern.
17x1.85" aluminum rims (DOT compliant).
17x2.75" off-road knobby tires.

Structure

Payload: 150kg | 330lb (incl. rider)
Super X step through frame:
▶ 7027 alloy.
▶ Front and rear racks standard.
▶ 19 drop forged attachment lugs on sub frame & rack.
Dual kickstands (stand bike on either side).

Suspension

UBCO ATFZ 130mm front suspension:
▶ Tapered chromoly steerer, chrome steel stanchions, alloy lower (corrosion resistant)
▶ Coil spring with hydraulic dampener.
▶ Preload & rebound adjustment.
UBCO ATF 120mm rear suspension:
▶ Coil over spring with hydraulic dampener.
▶ Preload & rebound adjustment.

Power Supply

Match the capacity to your needs: 2.1kWh, 2.6kWh, or 3.1kWh.

UBCO dual safety system – active and passive safety:

- ▶ Active safety:
 - ▶ UBCO 'Scotty' battery management system (BMS).
 - ▶ Real time performance and safety monitoring.
- ▶ Passive safety:
 - ▶ IP66 rated sealed alloy enclosure.
 - ▶ Vented enclosure with venting pathways.
 - ▶ 3400 mAh high safety factor INR (LiNiMnCoO₂) 18650 lithium ion cells.

Designed for disassembly at end of life.

Charging

10amp alloy fast charger.
Rugged alloy casing.
Can be wall mounted.
Charger detect disables 2X2 when charging.

User Controls

Fully electronic throttle control.
Handlebar mounted momentary switch control for horn.
Keyless fob operation utilizes code hopping technology, hard to clone or hotwire.
Kill switch can be programmed for on/off.

Lighting

Powerful 2400 lumen floodlight headlight.
Compact and lightweight.
Environmentally sealed.
LED rear brake lights.

Communication

Cerebro² vehicle management system (VMS):
▶ Integrates all electronic and electrical functions of the vehicle.
▶ Provides control and updates with Bluetooth 4.2.
Vented waterproof enclosure with sealed automotive connectors.
Isolated CAN bus for easier integration of future CAN devices.
CAN communication with power supply.
Support for optional UBCO 'Communicator' Telematic control unit (TCU).

Security

Power supply locks to frame.
Ability to track & trace with optional TCU.

Toolkit

Fastens under the lift-up seat.
Contains user manual and tools to set up and maintain your bike.

Vehicle Class

WMC PIN coded off road vehicle.
NOT road registrable:
▶ CE Compliant for off-road use in Europe. Can be registered as a farm/work vehicle in some European jurisdictions.
▶ RVCS approved for off-road use in Australia. Can be approved for a conditional registration for farm use.
▶ Compliant for off-road use in NZ.

Note: Check your local licensing laws to determine license requirements.

Preliminary release September 2020 - specs and features are subject to change.